

# 1

ONLY ONE - BUT FUN!


# QU-AX



Thank you for buying a quality QU-AX product - we hope you will have lots of pleasure with this giraffe! Please read these instructions carefully before assembling or using it.

- Check all screws, pedals, tire-pressure regularly - at least every 10 rides.
- Make sure you ride the giraffe in the right direction: cog and chain at your right when riding forwards. Improper use might untighten and damage pedal/ crank-connection.
- Serious injury may result from improper use, and by performing stunts. or tricks.
- We recommend an adult supervision when young children use the giraffe.
- This giraffe is made for indoor use on solid ground - and is suitable for riders up to 75 kgs.
- Always wear a helmet when riding the giraffe.

QU-AX GmbH  
 Dieselstr. 92  
 33442 Herzebrock-Clarholz  
 GERMANY  
 T +49-5245-924687  
 F +49-5245-924688  
 info@qu-ax.de  
 www.QU-AX.de

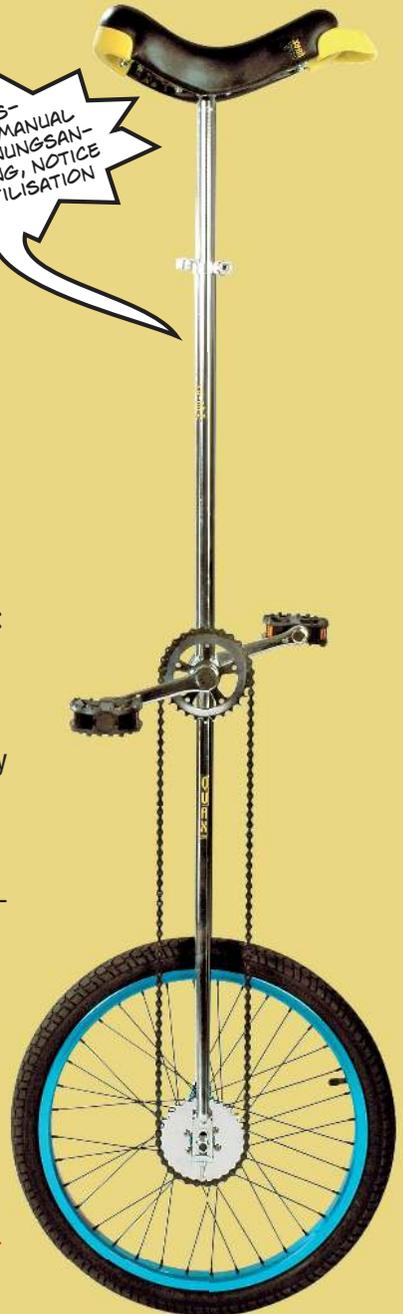

## user's manual giraffe

First, check the content of the box, there should be:

- the frame with assembled bottom-bracket and chainwheel
- the wheel with tyre, tube and cog
- the saddle & seatpost (assembled)
- a little box with: pedals, seatclamp, the assembled chain and a plastic-bag with catalogue and owners manual, DVD

Start with unscrewing the axle-bolts to make it easy to insert the wheel. Put the assembled chain on the chainwheel, make sure there are no loops in the chain. (1)

Then insert the wheel in the frame with the chain hanging loose beside the cog. (2) Then, put the chain-tension-screw and nuts on the frame like shown on the photo (3).



Next, tighten the 10mm nuts to adjust chain-tension. It should be tight enough, for being able to push the chain around 5 mm together with your hands when grabbing like on (5). Tighten both sides equally and step by step to make sure the wheel is in the middle of the frame like shown on (6).



Finally, tighten the axle-screws equally and step by step on both sides to fix the wheel in the frame. (7)



Assemble the seatpost-quick-release like shown in (8) and put it on the seattube.

Make sure both both slots in clamp and frame are aligned.

Now it's time to assemble the pedals: on the inside of the pedal-axle is an "R"

on the right pedal and an "L" on the left pedal. (9) Make sure the right-side pedal is assembled on the chainwheel-side crank. Tighten this one clockwise into the thread. The left pedal has to be tightened counter-clockwise! Retighten them after your first rides.



Now finish with installing saddle and seatpost into the frame. The handle on the saddle has to face forwards. When tube is inserted, align it to the wheel and tighten the quick-release. (10)

