



ASSEMBLY

THE ASSEMBLY HAS TO BE DONE BY AN ADULT - OR UNDER SURVEY OF AN ADULT!


1

FIRST, MAKE SURE ALL PARTS ARE READY LIKE HERE:



2

MAKE SURE ALL PLASTIC BUSHINGS ARE IN THE FRAME (TOTAL: 4)

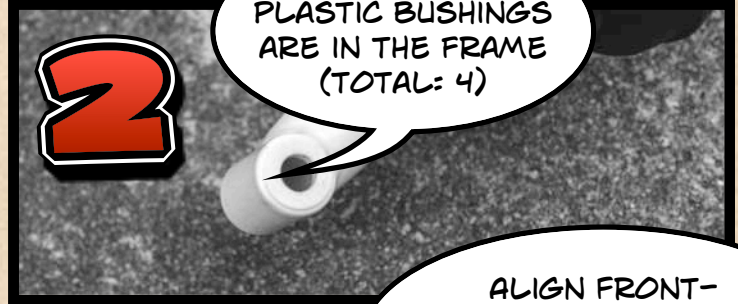

3

ALIGN FRONT-STEERING LIKE HERE AND INSERT THE LONG SCREWS FROM THE TOP




4



PUT THE SHORT SCREW IN FROM BELOW AND TIGHTEN WITH THE TWO 5 MM ALLEN-KEYS.

5

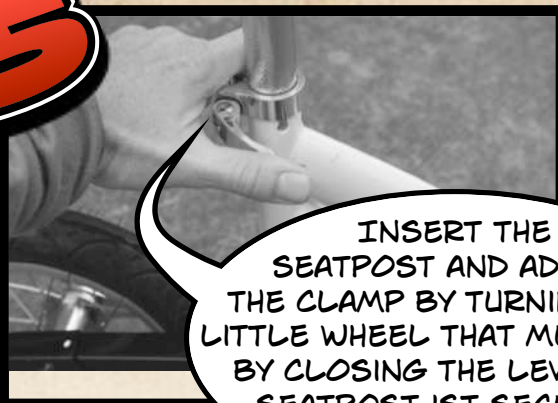

INSERT THE SEATPOST AND ADJUST THE CLAMP BY TURNING THE LITTLE WHEEL THAT MUCH THAT BY CLOSING THE LEVER THE SEATPOST IS SECURELY FIXED

- ONLY RIDE ON CLEAN, FLAT AND DRY SURFACES
- DO NOT DRIVE AGAIN WALLS OR OBSTACLES, IT WILL DAMAGE STEERING
- USING THE COASTER-BRAKE OFTEN TO BLOCK THE WHEEL WILL QUICKLY WEAR THE REAR TIRE
- WEAR STURDY SHOES AND A HELMET
- DO NOT USE ON PUBLIC ROADS
- MAX. RIDER WEIGHT: 70 KGS

ASSEMBLE THE BALANCE-TRAINER LIKE SHOWN HERE, CHECK TIRE-PRESSURE BEFORE THE RIDE: (AROUND 45 PSI, 3 BARS), AFTER THE FIRST RIDES, CHECK ALL SCREWS.

TURN BY SHIFTING YOUR WEIGHT SIDEWAYS. HAVE FUN!!